


10" Touch Panel PC



TD-1050



Slim Chassis depth
Less than 3cm when installed on a wall



NFC (Near Field Communication)
Support interactive RFID/Mifare/FeliCa



Glass / Surface / Recessed Mount
Mountable on all surfaces



PoE+ (Power over Ethernet)
Single cable; clean installation. IEEE 802.3at standard



LED light bar
Designed with LED light bar on the side of chassis is obvious to realize if there is any meeting room available.




RTSP (Real time streaming protocol)
Support Live content Input through network

Technical Specification



NFC (Near Field Communication)

LED light bar

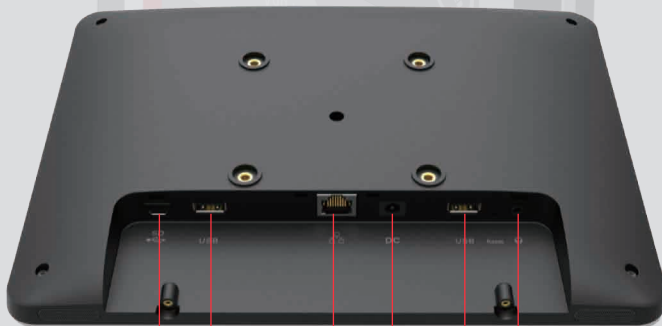

Micro SD USB Ethernet DC in USB Audio Out



Features

Programming API	HTML5 / SMIL / Android SDK
CPU	ARM quad-core 1.6GHz
Memory	2GB DDR3
Storage	8GB eMMC
Video decoder	H.264/MPEG-4/VC-1/MVC
Image codecs	JPEG/PNG (max. 1920x1080)
Orientation display	Landscape
Audio codecs	MP3
NFC module	V
PoE+	V

Display

Size	10.1"
Resolution (Max.)	1280 x 800
Brightness	300 nits
Contrast ratio	1000:1
Touch	V
Viewing angle (H/V)	178/178

IO interface

Ethernet	1 x RJ45 (10M/100M)
USB	2 x USB2.0 type
Analog Stereo out	1 x 3.5mm stereo
Expansion storage	1 x Micro SDHC slot
Speaker	2W x 2

Mechanical&Environment

Dimension (WxDxH) without stand	261.1 x 193.3 x 27mm (10.28" x 7.61" x 1.06")
Weight	710g / 1.56 lbs
Mounting	Glass / Surface / Recessed
Housing	Plastic
Environment	Operating Temp. 0~50°C Storage temperature : -20°C to 60°C Humidity : 10 to 85% (non-condensing)
Power	DC 12V, 1.5A
Certification	CE/FCC/BSMI/NCC/IC/CCC/SRRC/IMDA/BIS/WPC/RoHS
Warranty	1yr

